


MR11

- Only for Use in Approved Halogen Fixtures
- 35mm, Dichroic Coating, Faceted Mirror Reflector
- Miniature 2-Pin Base - GZ4
- 12 & 24 Volts
- Universal Burn Position
- Available with Front Glass Cover (FG)



Watts (W)	Ordering Code	Lamp Description	MOL (mm)	Color Temp (K)	Angle	Beam Spread	Max CP (cd)	Ave Life (h)	Case Qty
Miniature 2-Pin Base – GZ4									
12	1000615	FTA, JDR/M12V-12W/G/NSP9.5	35.0	2925	9.5°	Narrow Spot	2300	2000	10
12	1000616	FTA/FG, JDR/M12V-12W/G/NSP9.5/FG	35.0	2925	9.5°	Narrow Spot	2300	2000	10
20	1000617	FTB, JDR/M12V-20W/G/SP10	35.0	2925	10°	Spot	3000	2000	10
20	1000618	FTB/FG, JDR/M12V-20W/G/SP10/FG	40.9	2925	10°	Spot	3000	2000	10
20	1000619	FTC, JDR/M12V-20W/G/SP17	35.0	2925	17°	Spot	1400	2000	10
20	1000620	FTC/FG, JDR/M12V-20W/G/SP17/FG	35.0	2925	17°	Spot	1400	2000	10
20	1000621	FTD, JDR/M12V-20W/G/FL30	35.0	2925	30°	Flood	600	2000	10
20	1000622	FTD/FG, JDR/M12V-20W/G/FL30/FG	40.9	2925	30°	Flood	600	2000	10
35	1000625	FTF, JDR/M12V-35W/G/SP20	35.0	2950	20°	Spot	2400	2000	10
35	1000627	FTH, JDR/M12V-35W/G/FL30	35.0	2950	30°	Flood	1300	2000	10
35	1000628	FTH/FG, JDR/M12V-35W/G/FL30/FG	40.9	2950	30°	Flood	1300	2000	10
24 Volt, Miniature 2-Pin Base – GZ4									
20	1001000	JDR/M24V-20W/SP19/FG	40.9	2925	19°	Spot	1150	2000	10
20	1001004	JDR/M24V-20W/FL30/FG	35.0	2925	30°	Flood	500	2000	10
35	1001007	JDR/M24V-35W/SP13	35.0	2925	13°	Spot	2100	2000	10
35	1001010	JDR/M24V-35W/FL30/FG	35.0	2950	30°	Flood	850	2000	10

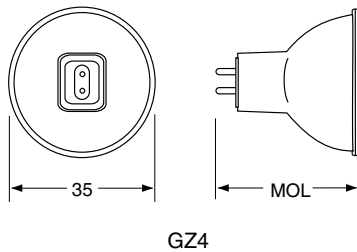

ø(ft)	H(ft)	E(fc)
0.56	3.3	213.67
1.08	6.5	53.42
1.64	9.8	23.78
9.5°	FTA	12W

ø(ft)	H(ft)	E(fc)
0.56	3.3	278.70
1.12	6.5	69.68
1.67	9.8	30.94
10°	FTB	20W

ø(ft)	H(ft)	E(fc)
0.98	3.3	130.06
1.97	6.5	32.52
2.95	9.8	14.49
17°	FTC	20W

ø(ft)	H(ft)	E(fc)
1.77	3.3	55.74
3.54	6.5	13.94
5.31	9.8	6.22
30°	FTD	20W

ø(ft)	H(ft)	E(fc)
1.15	3.3	222.96
2.30	6.5	55.74
3.48	9.8	24.80
20°	FTF	35W

ø(ft)	H(ft)	E(fc)
1.77	3.3	120.77
3.54	6.5	30.19
5.31	9.8	13.38
30°	FTH	35W

ø(ft)	H(ft)	E(fc)
1.12	3.3	106.84
2.20	6.5	26.76
3.28	9.8	11.89
19° JDR/M24V-20W/SP		20W

ø(ft)	H(ft)	E(fc)
1.77	3.3	46.45
3.54	6.5	11.61
5.31	9.8	5.20
30° JDR/M24V-20W/FL		20W

ø(ft)	H(ft)	E(fc)
0.08	3.3	195.09
1.51	6.5	48.77
2.23	9.8	21.64
13° JDR/M24V-35W/SP		35W

ø(ft)	H(ft)	E(fc)
1.77	3.3	78.97
3.54	6.5	19.79
5.31	9.8	8.73
30° JDR/M24V-35W/FL		35W


TUNGSTEN HALOGEN LAMPS • MR11 REFLECTOR

MR11

- Only for Use in Approved Enclosed Halogen Fixtures
- Miniature 2-Pin Base - GZ4, 2-Pin Base - G4.8/5.3 & Double Contact Bayonet Base - BA15d
- Low Voltage
- Universal Burn Position
- Faceted (except as noted)



Watts (W)	Ordering Code	Lamp Description	MOL (mm)	Reflector Type	Filament Type	Color Temp (K)	Beam Angle	Spread	Max CP (cd)	Ave Life (h)	Case Qty
Miniature 2-Pin Base – GZ4											
10	1000931	JCR/M6V-10WN/FG	40.8	Faceted	C-6	3050	8.5°	Narrow Spot	3000	200	100
15	1000932	JCR/M6V-15W/FG/XX MR11	35.0	Faceted	C-6	3050	17°	Spot	3900	500	100
20	1000934	JCR/M6V-20W	33.3	Faceted	C-6	3200	20°	Spot	1800	50	10
35	1000930	JCR/M14V-35W	36.0	Specular	C-8	—	—	—	—	50	10
50	1000926	JCR/M12V-50W	35.0	Specular	C-8	—	—	—	—	50	10
2-Pin Base – G4.8/5.3											
75	1000929	JCR/M12V-75W/HO	37.0	Specular	C-8	—	—	—	—	50	10
100	1000921	JCR/M12V-100W	37.0	Specular	C-8	3400	—	—	—	25	10
Double Contact Bayonet Base – BA15d											
20	1000609	FST, JDR/M12V-20W/BA/SP17	44.0	Faceted	C-6	2900	17°	Spot	1400	2000	10
20	1000610	FST/FG, JDR/M12V-20W/BA/SP17/FG	46.5	Faceted	C-6	2900	17°	Spot	1400	2000	10
35	1000659	GDZ, JDR/M12V-35W/BA/FL30	45.0	Faceted	C-6	2950	30°	Flood	1600	2000	10

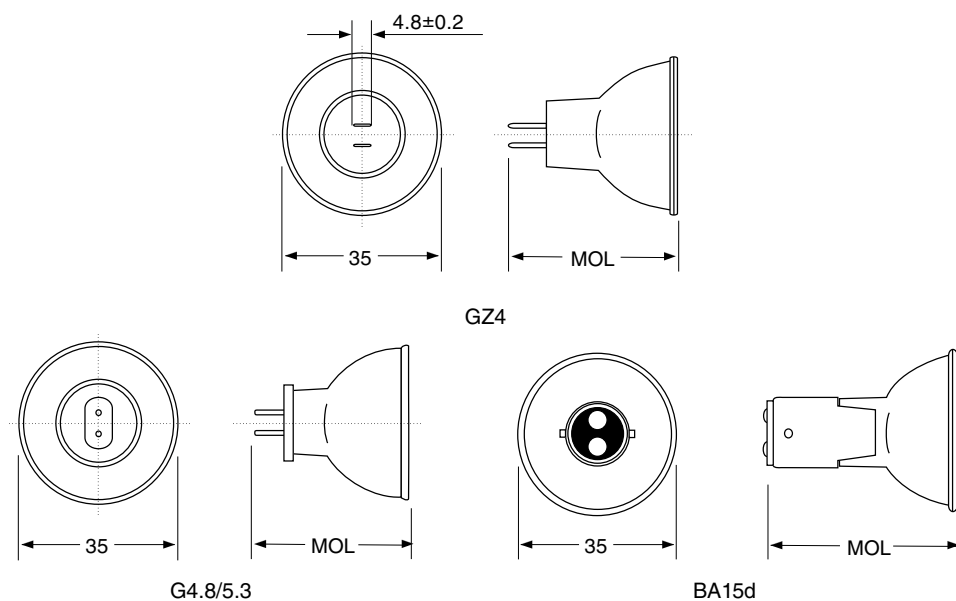

ø(ft)	H(ft)	E(fc)
0.98	3.3	130.06
1.97	6.5	30.19
2.95	9.8	13.38
17°	FST	20W

ø(ft)	H(ft)	E(fc)
1.77	3.3	148.64
3.54	6.5	37.16
5.31	9.8	16.54
30°	GDZ	35W