




LED ARCHITECTURAL MINI WALLPACK GEN 2

15W 5000K - NO PHOTOCELL

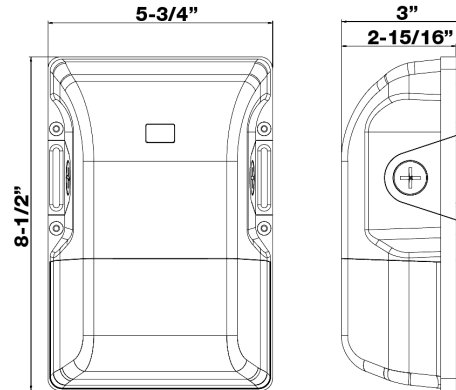



Features:

Architectural Grade Entrance Lighting
High Efficacy
Instant Start LED
LED Directed Optics
Photocell Not Included

IP65 Internal Driver
No UV or IR in the Beam
Easy to Install
Energy Saving

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Light Pattern	Lumens/ Watt	Photocell Installed	DLC PRODUCT ID#
71590A	Bronze	15	1954	5000	120-277	83	96°	135	No	PLF22OURFY9J

PHOTOMETRY

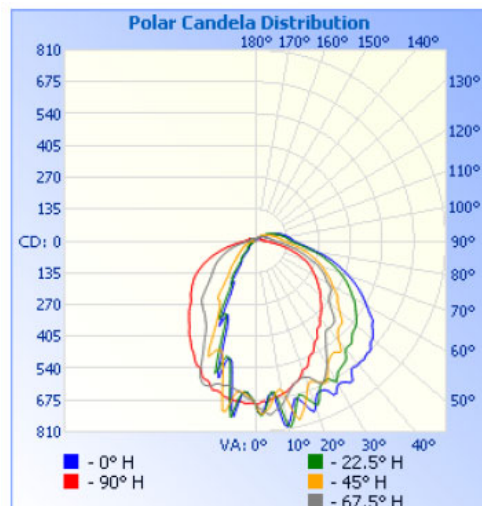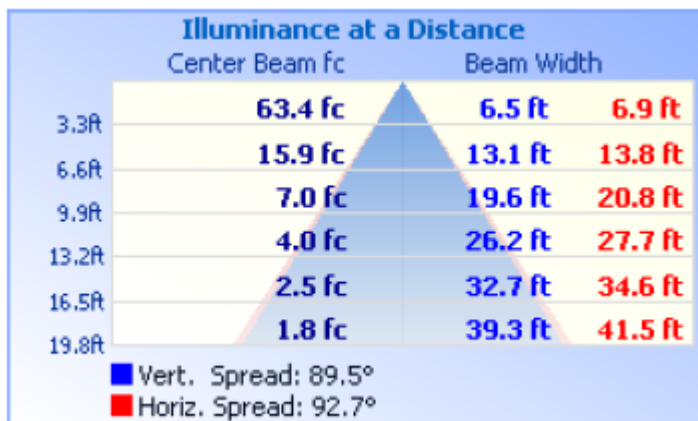



LED ARCHITECTURAL MINI WALLPACK GEN 2 15W 5000K - NO PHOTOCELL

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .124A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: 17%

Product Parameters:

15 Watts

Lumens: 1954

Efficacy: 135 Lumens Per Watt

50,000+ LED Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 96°

BUG Rating: B1 U3 G1

CRI: >83

R9: 5

DUV: .0011

Chromaticity (x,y): $x=0.3250$; $y=0.3366$

Chromaticity (u,v): $u=0.2035$; $v=0.4742$

Component Specifications:

LED: Lumiled SMD 2835

Driver: 100-277V 50-60HZ

Driver Output Volts: 58V

Driver Output Amps: 230mA

Dimming:

N/A

Operating Temperature:

Minimum Starting -4°F - 113°F

Construction:

Housing: Die Cast Aluminum

Powder Coated Bronze

IP Rating: IP65

Lens Material: Polycarbonate

Mounting: Wall Mount

Listings: UL Listed

Carton Qty: 1

Weight: 1.87 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).